

BDS Blackout Dock Shelter

Product Specifications



DESIGN HIGHLIGHTS

- Exclusive DryDock® S-900DD Integral Rain Header protects dock from moisture infiltration with a highly resilient foam core and automatic positioning
- Exclusive Hinge Guard™ effectively seals hinge gap along opened trailer doors, is made of High Molecular Weight Polyethylene (HMWPE), and attached securely with industrial hook and loop for easy replacement
- Exclusive LightBlockr™ connector curtain blocks air and light infiltration at overlap of side and head curtains.
- Exclusive roll-formed galvanized steel framing
- Head curtain wear pleats and bottom wear panels with exclusive UHWR™ (Ultra High Wear Resistant) fabric
- Canopy style rigid head frame increases structural integrity while translucent head member allows operating light
- Impactable foam-filled side members
- Raked header for moisture run-off
- Foam filled draft pads

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: ☐ Yes ☐ No

Rear step section: ☐ Yes ☐ No

Tailgate/step section size: _____ in

Yard jockeys: ☐ Yes ☐ No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

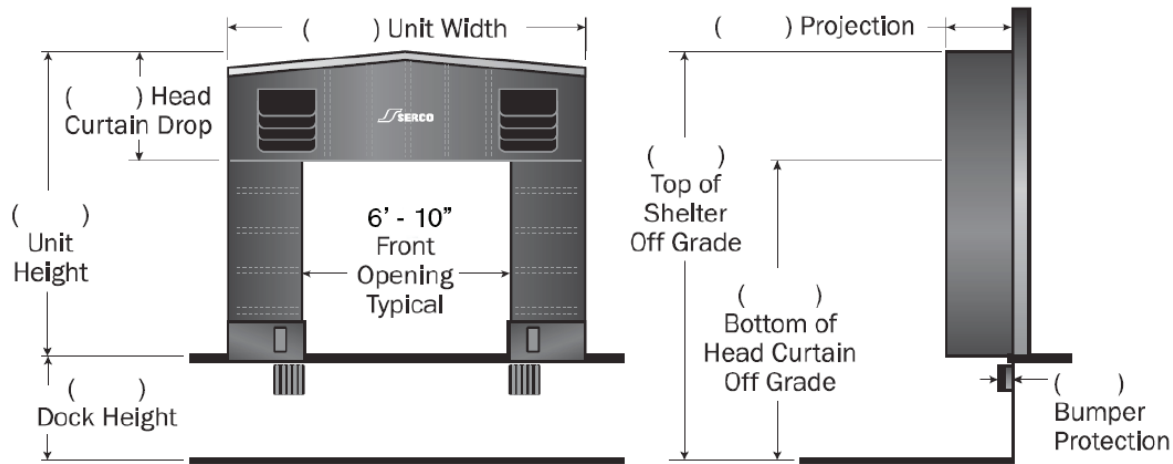

Quantity _____ Drive Approach: ☐ Level ☐ Incline ☐ Decline ☐ _____ % of grade

Building Wall Structure: ☐ Metal ☐ Other

Unit Width: ☐ 11'6" ☐ 11'7" ☐ 11'10" ☐ 12'2"

Unit Height: ☐ 11' ☐ 11'6" ☐ 12' ☐ 12'6"

Head Member Style: ☐ Raked ☐ Flat

Curtain Material: ☐ 40 oz. vinyl standard ☐ XL-100

Color: Black only

Head Curtain Drop: ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ 54" ☐ _____"

Taper: ☐ Yes ☐ No

Top Projection: ☐ _____" (23" - 42")

Bottom Projection: ☐ _____" (23" - 42")

Options: ☐ Door numbers ☐ Full length guide stripes

*Note: Consult factory for blackout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Serco
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.933.4834
www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Serco as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. Form # SPS-SHFF-0925