

# S2200 Ultra Dock Shelter

## Product Specifications



### DESIGN HIGHLIGHTS

- Impactable foam-filled side members
- Roll-formed galvanized steel framing
- Fiberglass stays in side/head curtains
- Translucent head member transmits light
- Raked header for moisture run-off
- Foam filled draft pads
- Full range of colors and fabrics

### APPLICATION DATA

Door width: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Door height: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Dock height: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Bumper protection\*: \_\_\_\_\_ in.

(\*Includes bumper projection and any building wall/foundation offset or cantilever)

### TRUCKS AND TRAILERS SERVICED

Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Hydraulic tailgate: ☐ Yes ☐ No

Tailgate/step section size: \_\_\_\_\_ in

Rear step section: ☐ Yes ☐ No

Yard jockeys: ☐ Yes ☐ No

### PROJECT INFORMATION

JOB NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

GENERAL CONTRACTOR \_\_\_\_\_

DISTRIBUTOR \_\_\_\_\_

MODEL \_\_\_\_\_ QUANTITY \_\_\_\_\_


### CERTIFIED FOR CONSTRUCTION

BY \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_

DATE \_\_\_\_\_

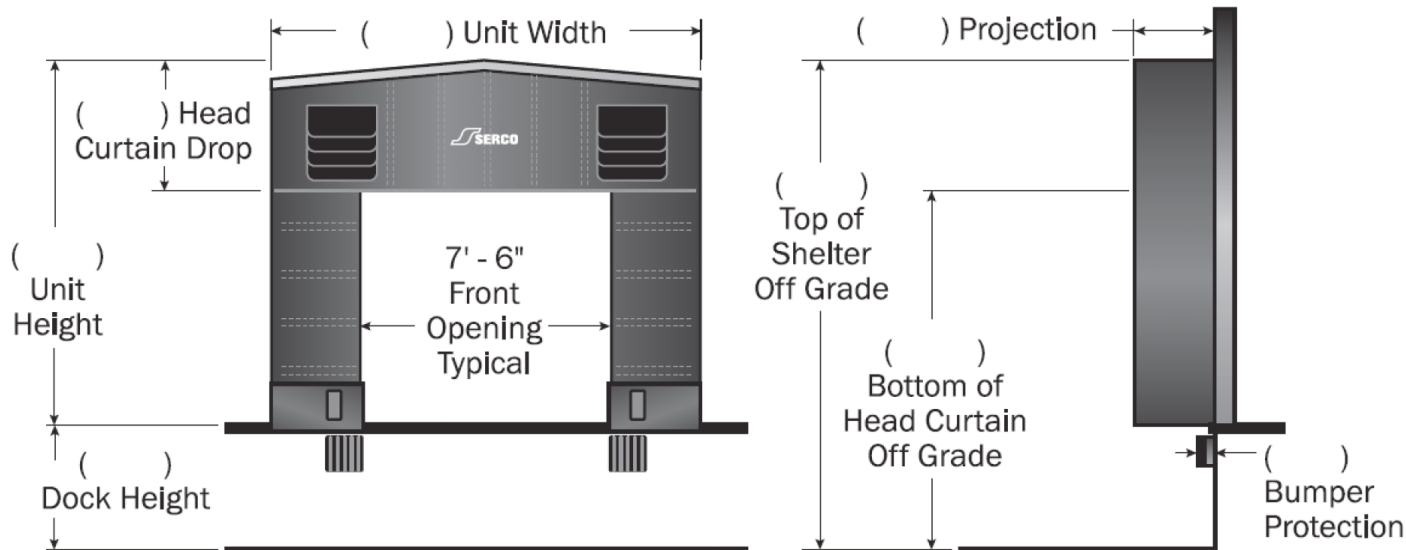

Quantity \_\_\_\_\_ Drive Approach: ☐ Level ☐ Incline ☐ Decline ☐ \_\_\_\_\_ % of grade

Building Wall Structure: ☐ Metal ☐ Other

Unit Width: ☐ 11'6" ☐ 12' ☐ 12'6"

Unit Height: ☐ 11' ☐ 11'6" ☐ 12' ☐ 12'6"

Head Member Style: ☐ Raked ☐ Flat

Curtain Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Head Curtain Drop: ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ 54" ☐ \_\_\_\_\_"

Tapered: ☐ Yes ☐ No

Top Projection: ☐ 18" ☐ 20" ☐ 22" ☐ 24" ☐ 26" ☐ 28" ☐ 30" ☐ 36" ☐ 42" ☐ \_\_\_\_\_"

Bottom Projection: ☐ 18" ☐ 20" ☐ 22" ☐ 24" ☐ 26" ☐ 28" ☐ 30" ☐ 36" ☐ 42"

Options: ☐ Door numbers ☐ Full length guide stripes ☐ Pull rope Assy ☐ Dry Dock/Aquashield

\*Note: For projection options of 24" and below, the side member backing is 8" wide; for 25" and above, the side member backing is 10".

\*Note: Consult factory for blackout application assistance.

\*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



**Serco**  
1612 Hutton Drive, Suite 140  
Carrollton, TX 75006  
800.933.4834  
www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Serco as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. Form # SPS-SHFS-1025