

S420 Rigid Frame Dock Shelter

Product Specifications



DESIGN HIGHLIGHTS

- Raked translucent head frame protects dock from elements while allowing natural light to enter dock area
- Overlapping layers of fabric provide more wear resistance against the sharp corners of the trailer, extending the life of the shelter
- Flexible fiberglass stays ensure that head and side curtain pressure is maintained on the truck body while compressible neoprene cords conform to the vehicle's irregular perimeter
- High visibility guide stripes assist drivers with proper positioning of trailer
- Frame covered with translucent fiberglass allowing natural light to enter the dock area
- Steel supports protect frame from off-center trailers
- Roll-formed galvanized steel framing (5-year warranty)
- Choice of fabric and colors

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: ☐ Yes ☐ No

Tailgate/step section size: _____ in

Rear step section: ☐ Yes ☐ No

Yard jockeys: ☐ Yes ☐ No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

MODEL _____ QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

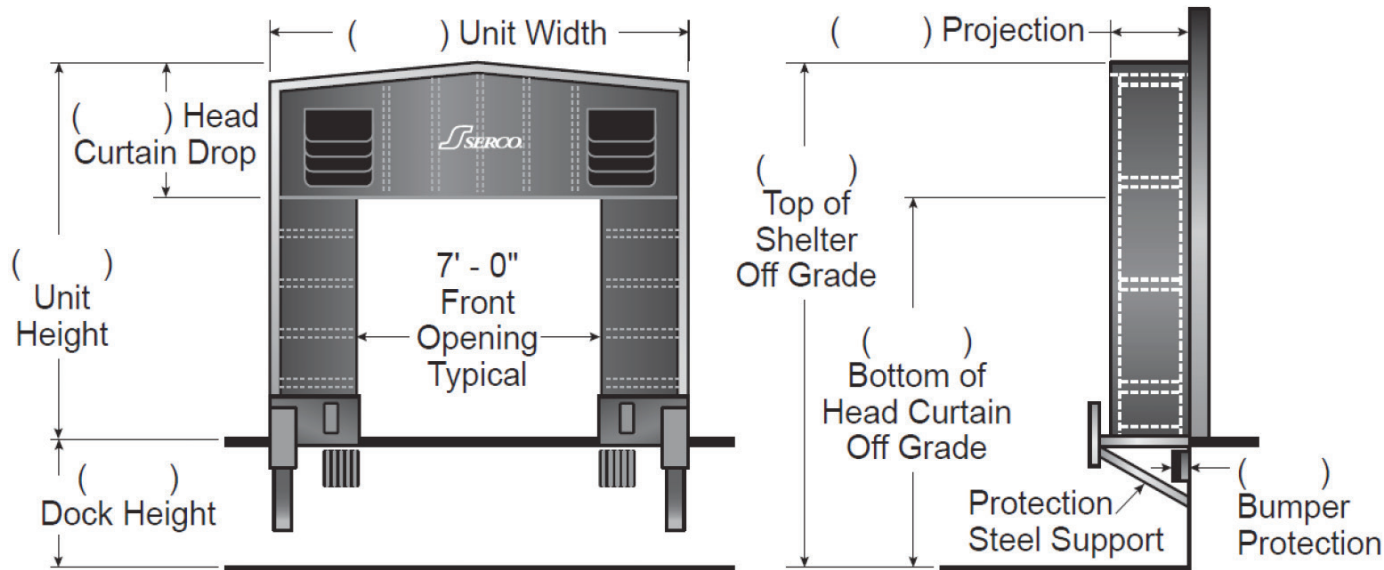

Quantity _____ ☐ Complete unit ☐ Common member

Drive Approach: ☐ Level ☐ Incline ☐ Decline ☐ _____ % of grade

Framing: ☐ Standard galvanized steel ☐ Steel tube

Building Wall Structure: ☐ Metal ☐ Other

Unit Width: ☐ 11'6" ☐ 12' ☐ 12'6" ☐ 13' ☐ _____"

Unit Height: ☐ 11' ☐ 11'6" ☐ 12'6" ☐ 13'6" ☐ 14'6" ☐ 15'6"

Head Member Style: ☐ Raked ☐ Flat ☐ Single steel tube

Base Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ XL-100

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Head Curtain Drop: ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ 54" ☐ 60" ☐ 66" ☐ 72"

Tapered: ☐ Yes ☐ No

Top Projection: ☐ 24" ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ _____"

Bottom Projection: ☐ 24" ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ _____"

Draft Pad: ☐ 24" ☐ 30" ☐ 36" ☐ 42" ☐ 48"

Steel Supports: ☐ None ☐ 24" ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ 54"

Steel Support Extensions: ☐ None ☐ 6" ☐ 12" (Specify front channel or back extensions)

Options: ☐ Door numbers ☐ Full length guide stripes ☐ Pull rope Assy

*Note: Consult factory for blackout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Serco
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.933.4834
www.sercodockproducts.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Serco as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. Form # SPS-SHRF-0925